

BituPlan

FixPlan optimization for Bitumen roofs

- durably reliable roof sealing for Bitumen roofs
- high-value materials (VA 1.4301 and EPDM)
- direct fastening to the substructure




Description

The Schletter FixPlan system is suitable for flat roof coverings without special fastening options. The new BituPlan is an optimization of our proven FixPlan especially for Bitumen roofs. The utilization of a special sealing underlayment safeguards a durably tight connection to the roof surface.

Mounting

- 1 Screw in the hanger bolt.
- 2 Pull the protective foil off the BituPlan, apply the BituPlan (glueing side directed to the roof cladding), positioning by pre-assembled hanger bolt.
- 3 Apply the sealing plate, position the cone sealing and press it slightly using the sealing nut.
- 4 After that, fasten the mounting plate with two counter nuts and connect it to the supporting structure.

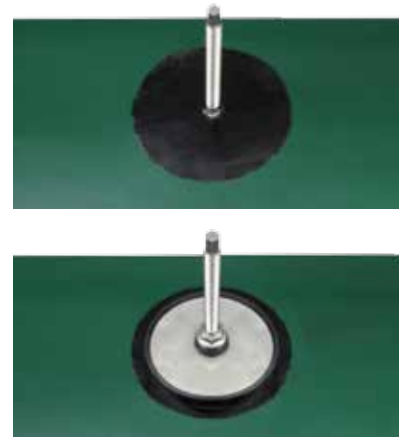

Information

Clean, dry, free of grease - Bitumen sheetings have to be heated up when the temperature is very low in order to maintain the warranty. Roof sheetings with sand or slate surfaces have to be cleaned down to the base course. The connection has to be carried out according to roofing standards.

For this fastening solution, we recommend the following thread sealant:
195000-032 screw securing 50ml ➔ [Thread sealant product sheet](#)

Technical data

Material	Black aluminium, flat with overall butyl glue on the back side (also in black)
Dimensions	External diameter BituPlan 120 mm, hole diameter 13mm, item number: 114 004-000
Application	On flat Bitumen roofs with plane boarding, but only if the structural safety of the substructure is verified

System prices can be obtained quickly and easily with our auto-calculator!
 Further information and declaration of guarantee at www.schletter.eu

*acc. to our General Terms and Conditions of Sale and Supply (www.schletter.de/AGB)
 Subject to modifications and also technical modifications.