

Duraklick (Knubix)

Eco




Mounting-System Eco

The new **Duraklick-Eco** is a economical and inexpensive alternative to our SR-system. This mounting-system for flatroofs consists of the same high-quality components as our SR-system – but without spoilers and windplates.

It is lightweight, self-supporting and made of aluminium. Installation is without roof-penetration and with a little bit more ballast than the SR-system. On higher buildings and/or high windloads we recommend the installation of optional windplates on the north-area. The wide floor-rails and additional building protection mats as an installation foundation offer good protection for the roof membrane.

Convincing Features:

- ▶ Inexpensive and easy to assemble
- ▶ Best load-distribution due to our 230 mm wide floor-rails
- ▶ Corrosion-resistant materials
- ▶ Certified by TUV-Rheinland
- ▶ Made in Germany



Mounting-System Eco

Eco

Duraklick-Eco is available in three versions:


Eco 10° - gap-measurement 1.35 m up to 1.75 m

Eco 15° - gap-measurement 1.50 m up to 2.00 m

Eco 20° - gap-measurement 1.80 m up to 2.50 m

This system was not windchannel-tested therefore, SOLTOP can not provide any static evaluations. No statics included.

On request there are evaluations possible by a external static-bureau and charged.

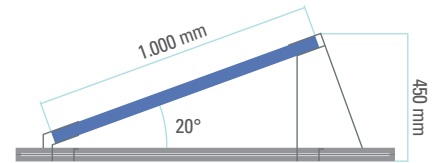

Technical Specifications

Inclination:	10° / 15° / 20°
Rail length:	0.7 - 6.0 m
Modul width:	flexible
Distributed load:	ab ca. 7.0 kg/m ² *
Liniar load:	ca. 16.8 kg/m *
Material:	aluminium / stainless steel

* assuming a module weight of 19 kg



SOLTOP
SONNE WÄRME STROM

SOLTOP Schuppisser AG
St. Gallerstrasse 3 + 5a
CH-8353 Elgg (Switzerland)

www.soltop.ch